




- Ai** 3X brighter than the LL5806/LL6212
- Ai** For use in long distance or large area inspections
- Ai** Expandable up to 1219.2mm (48")
- Ai** Wash down option provides IP64 Compliant Design

### Ordering Information

**Standard Product Variation:** Shipped Within Two Weeks


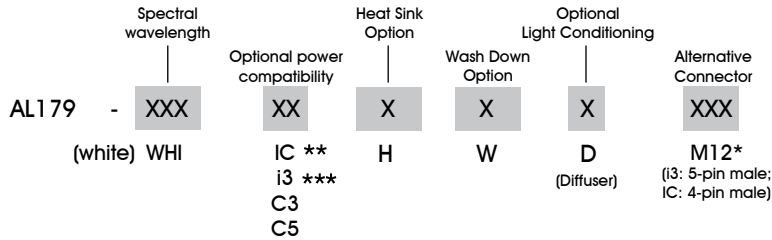


IC = iCS (requires 24v power supply)  
i3 = Combined continuous-on and strobe over-drive (24 volt PS required.)  
C3 = Pulsar 710 Connector  
C5 = Pulsar 320 Connector  
\* Available with IC and i3 options only  
\*\* Available up to 457.2mm (18") max  
\*\*\* Available up to 304.8mm (12") max

### Dimensional Information

[Click for Installation Models & Drawings](#)

AL179		
PART NUMBER	NON-SEALED	SEALED
AL179	173.7 (6.84)	176.8 (6.96)
AL17912	326.1 (12.84)	329.2 (12.96)
AL17918	478.6 (18.84)	481.6 (18.96)
AL17924	630.9 (24.84)	634.1 (24.96)
AL17930	783.3 (30.84)	786.4 (30.96)
AL17936	935.7 (36.84)	938.8 (36.96)
AL17942	1088.1 (42.84)	1091.2 (42.96)
AL17948	1240.5 (48.84)	1243.6 (48.96)

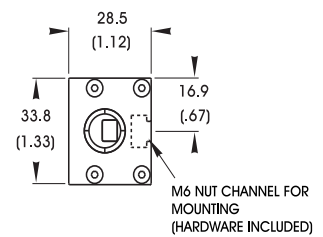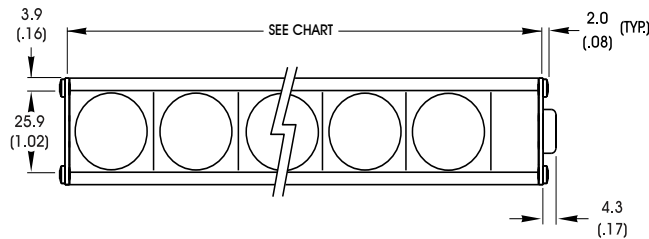

Cable Length: 1.5 Meter (59")  
Find installation models at [advancedillumination.com/drawandmodels.html](http://advancedillumination.com/drawandmodels.html)

DIMENSIONS ARE IN MILLIMETERS (INCHES)

STANDARD CABLE LENGTH: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

### Accessories

#### Power Consumption

12W @ 24v DC

#### General Specifications

Weight: 226.8 g (8.0 oz)  
Finish: Black Anodized

Operating Temperature: 0-60 C°  
Meets Specifications: CE, RoHS